

MOBILE FLOOR CRANES

2200-4400 lbs.

FC2200

U.S. Patent No. 3,367,512
Patented 1969 Canada


Piston rod
is ground
and hard
chrome
plated.

Load-lowering valve
provides controlled descent.

Pump has a
safety relief valve.

Crane is locked in
position when
wheels are lifted.

Adjustable
Legs

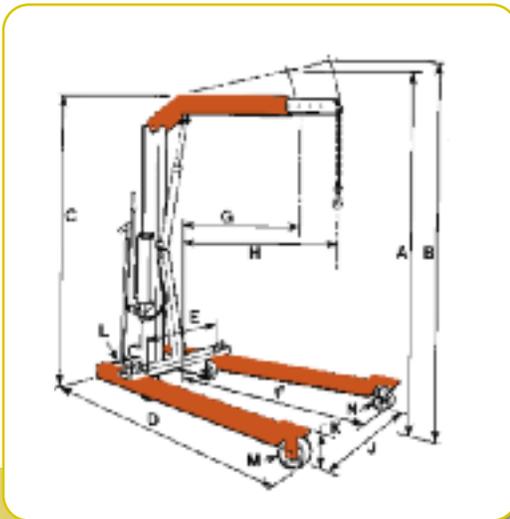

DIMENSIONS

| | FC2200* | FC4400* |
|-----------------------------|---------------------|---------------------|
| Cap., boom ret. (lbs.) | 2,200 | 4,400 |
| Cap., boom ext. (lbs.) | 1,650 | 3,300 |
| A Max. boom hgt., (ret.) | 107" | 111" |
| B Max. boom hgt., (ext.) | 117" | 122" |
| C Overall hgt., boom horiz. | 80" | 82" |
| D Overall length | 83" | 89" |
| E Min. throat width | 24" | 25" |
| F Inside leg length | 54" | 57½" |
| G Eff. boom reach (ret.) | 33" | 35½" |
| H Eff. boom reach (ext.) | 48" | 50½" |
| J Inside leg width | 24" - 36" - 48" | 26" - 40" - 52½" |
| | (3-position) | (3-position) |
| K Leg height | 8" | 9½" |
| L Dolly wheel diameter | 5" | 5" |
| M Wheel diameter | 6" | 8" |
| N Caster diameter | 6" | 6" |
| Floor space, folded | 27" x 38" | 31" x 42" |
| Height, folded | 79" | 86" |

2,200 lbs. and 4,400 lbs. capacity
with space-saving fold-away
feature



- Adjustable legs spread to clear obstacles, telescoping boom for extra reach. Rugged construction, reliable hydraulics.
 - Boom collapses completely and legs fold for compact storage.
 - 2-speed hydraulic hand pump provides fast boom travel and precise operator controlled descent.
 - Roller bearing wheels and a steering dolly provide ease of mobility. Lifting chain is included.
- No. FC4400** – 4,400 lbs. cap. crane with fold-away feature, adj. leg spread, lifting chain and 2-speed hand pump. Wt., 646 lbs.



SHOP-EQUIPMENT