


Proportional throttle valve
Screw-in cartridge

- Direct operated, not pressure compensated
- Throttle in one flow direction
- $Q_{max} = 12 \text{ l/min}$, $p_{max} = 250 \text{ bar}$
- $Q_{Nmax} = 6,3 \text{ l/min}$

M18x1,5
 ISO 7789

DESCRIPTION

Direct operated proportional throttle valve. Thread M18x1,5 and cavity in accordance with ISO 7789. Spool options „normally closed“ and „normally open“. Two flow ranges are available. The volume flow is adjusted by a Wandfluh-proportional solenoid (VDE standard 0580). Progressive increase and decrease of volume flow and reduced hysteresis are characteristics of this valve. The cartridge body is made of steel. Its special surface coating protects the outside against corrosion and reduces friction of the control spool. The solenoid is zinc coated.

FUNCTION

The force controlled wet pin proportional solenoid acts directly on the control spool which opens or closes the throttle segments of the radial holes in the valve body. The throttle opening and therefore the flow volume changes proportionally to the current input to the proportional solenoid. With deenergised solenoid the control spool is held in closed respectively open position by a spring. To control the valve proportional amplifiers are available from Wandfluh (see register 1.13).

APPLICATION

Proportional throttle valves are suitable for precise feed control systems. Very sensitive opening and closing characteristics allow smooth control of movements in stationary or mobile installations, e.g. machine tools, public vehicles. Installation of the screw-in cartridge in control blocks as well as in the Wandfluh sandwich plates (vertical stacked systems) and flange valves of the NG3-Mini types. (Please note the separate data sheets in register 2.6). Cavity tools are available for machining the cavities in steel and aluminium (hire or purchase). Please refer to the data sheets in register 2.13.

CONTENT

GENERAL SPECIFICATIONS	1
HYDRAULIC SPECIFICATIONS	1
ELECTRICAL SPECIFICATIONS	1
SYMBOLS	2
CHARACTERISTICS	2
DIMENSIONS/ SECTIONAL DRAWINGS	2
PARTS LIST	2
ACCESSORIES	2

TYPE CODE

	D	<input type="checkbox"/>	P	PM18	-	<input type="text"/>	-	<input type="text"/>	#	<input type="checkbox"/>
Throttle valve										
Normally closed	<input type="checkbox"/>									
Normally open	<input type="checkbox"/>									
Proportional										
Screw-in cartridge M18x1,5										
Nominal volume flow rates:	$Q_N = 4 \text{ l/min}$	<input type="text" value="4"/>								
(at 10 bar pressure drop)	$Q_N = 6,3 \text{ l/min}$	<input type="text" value="6,3"/>								
Standard nominal voltage:	$U_N = 12 \text{ VDC}$	<input type="text" value="G12"/>								
	$U_N = 24 \text{ VDC}$	<input type="text" value="G24"/>								
Design-Index (Subject to change)										

GENERAL SPECIFICATIONS

Description	Direct operated proportional throttle valve
Construction	Screw-in cavity acc. to ISO 7789
Operations	Proportional solenoid
Befestigungsart	Screw-in thread M18x1,5
Ambient temperature	-20...+50 °C
Mounting position	any
Fastening torque	$M_D = 30 \text{ Nm}$ for screw-in cartridge $M_D = 1,2 \text{ Nm}$ (Qual. 8.8) for solenoid screws
Weight	$m = 0,25 \text{ kg}$
Volume flow direction	1 → 2

HYDRAULIC SPECIFICATIONS


Fluid	Mineral oil, other fluid on request
Contamination efficiency	ISO 4406:1999, class 18/16/13 (Required filtration grade $\beta_{6...10} \geq 75$) see data sheet 1.0-50/2
Viscosity range	12 mm ² /s...320 mm ² /s
Fluid temperature	-20...+70 °C
Peak pressure	$p_{max} = 250 \text{ bar}$
Nominal volume flow rates	$Q_N = 4 \text{ l/min}$, $Q_N = 6,3 \text{ l/min}$ at 10 bar pressure drop
Max. Volume flow	$Q_{max} = 12 \text{ l/min}$
Leakage volume flow	see characteristics
Resolution	1 mA
Repeatability	≤ 1% *
Hysteresis	≤ 2% *
	* at optimal dithersignal

ELECTRICAL SPECIFICATIONS


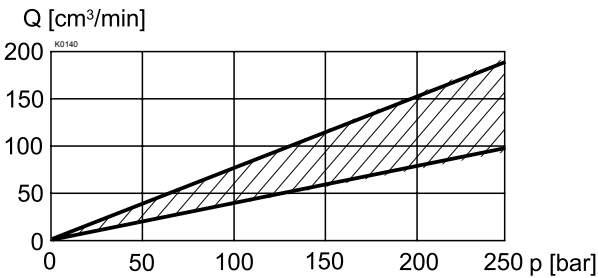
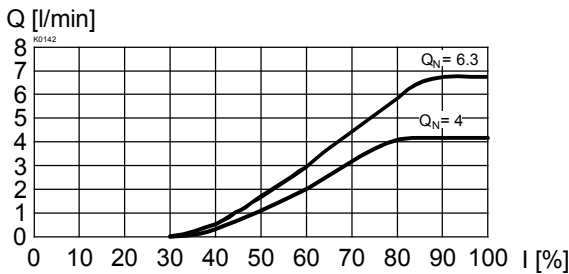
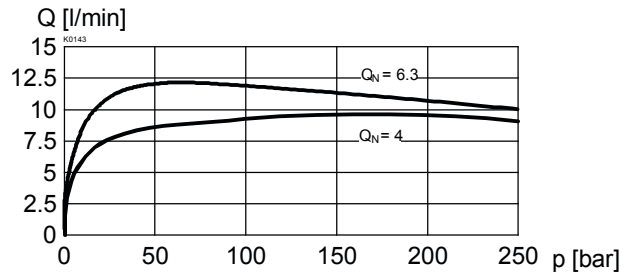
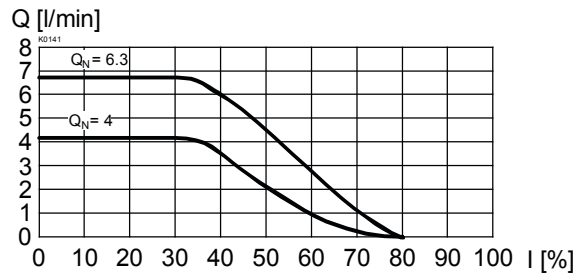
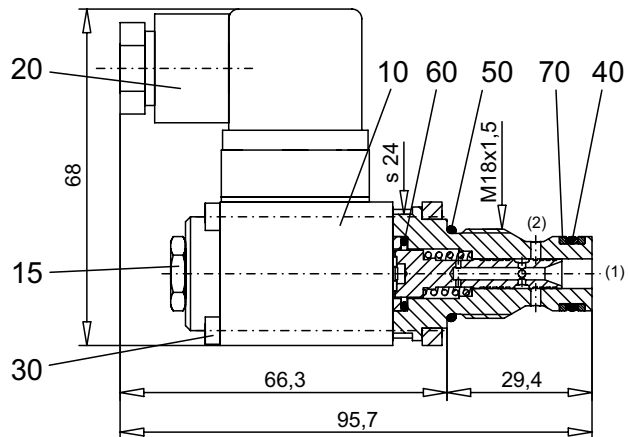
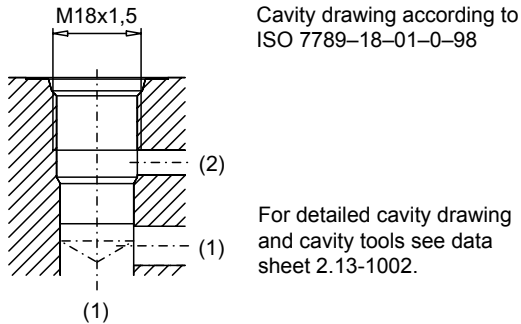
Construction	Proportional solenoid, wet pin push type, pressure tight.	
Standard-Nominal voltage	$U_N = 12 \text{ VDC}$	$U_N = 24 \text{ VDC}$
Limiting current	$I_G = 1080 \text{ mA}$	$I_G = 540 \text{ mA}$
Relative duty factor	100% DF (see data sheet 1.1-430)	
Protection class	IP 65 to EN 60 529	
Connection/Power supply	Over device plug connection to ISO 4400 / DIN 43 650 (2P+E)	
Other electrical specifications	see data sheet 1.1-90 (PI29V)	

SYMBOLS

Normally closed



Normally open


CHARACTERISTICS Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$
 $Q_L = f(p)$ Leakage volume flow characteristics

 $Q = f(I)$ DNPPM18 Volume flow adjustment characteristics

 $Q = f(p)$ Volume flow pressure characteristics

 $Q = f(I)$ DOPPM18 Volume flow adjustment characteristics

DIMENSIONS / SECTIONAL DRAWINGS

PARTS LIST

Position	Article	Description
10	256.2453 256.2418	Proportional solenoid PI29V-G24 Proportional solenoid PI29V-G12
15	253.8000	Mounted screw with integrated manual override HB4,5
20	219.2002	Plug (black)
30	246.0146	Socket head cap screw M3x45 DIN912
40	160.2111	O-ring ID 11,11x1,78
50	160.2156	O-ring ID 15,60x1,78
60	160.2120	O-ring ID 12,42x1,78
70	049.3156	Back up ring RD 12,1x15x1,4

ACCESSORIES

Cartridge built-in flange- or sandwich body

Flange/Sandwichplate

Proportional amplifier

register 2.6

register 1.13

Technical explanation see data sheet 1.0-100